
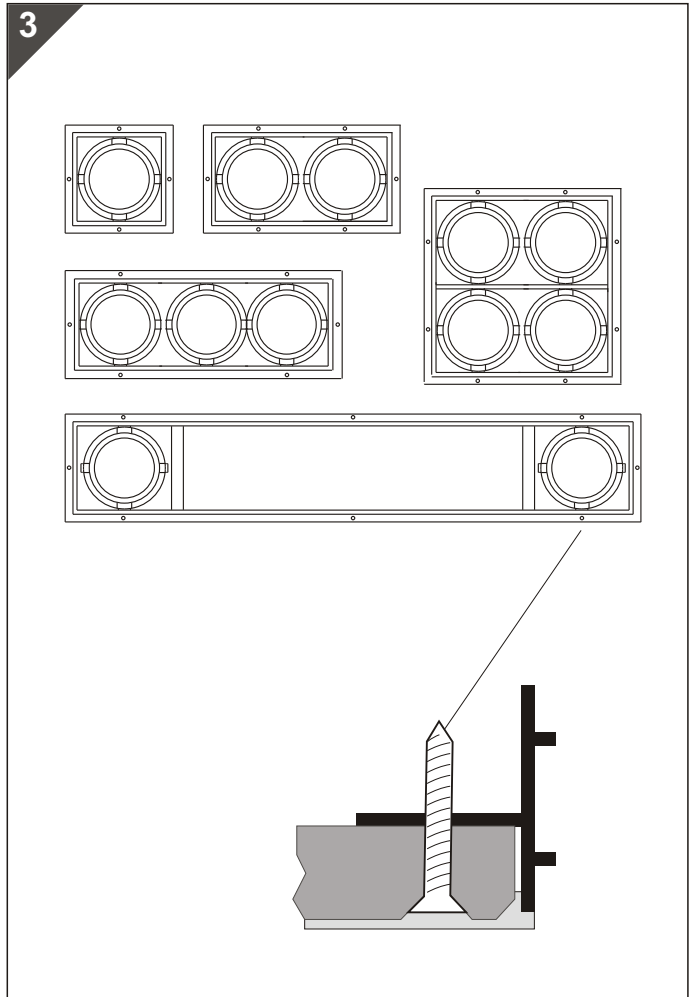
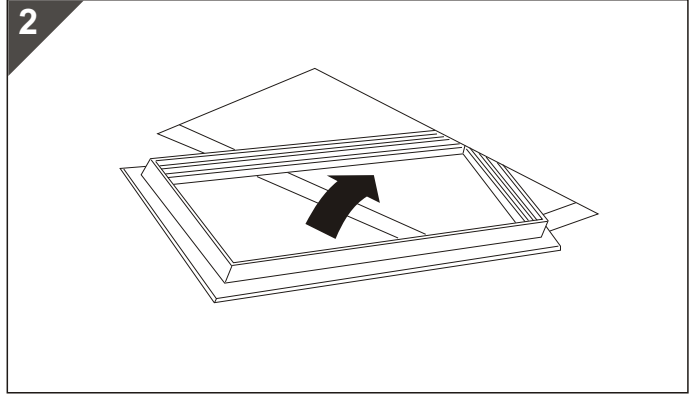


Installation Instruction


Multigimbalò Trimless
Mini-Multigimbalò Trimless
Micro-Multigimbalò Trimless

Art.
5470
)
5544
5582

Adjustable Recessed Downlight

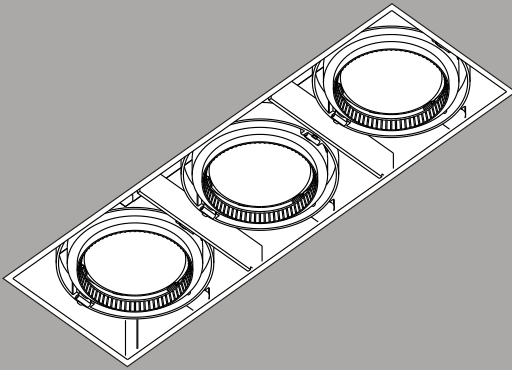




INSTALLATION









Make a hole at false ceiling.

Art.		ceiling hole(mm)
5470-5478		180x180
5479-5487		340x180
5488-5496, 5582		504x180
5497-5505		342x342
5506-5514		955x182
5515-5519		140x140
5520-5524		265x140
5525-5529		384x140
5530-5534		265x265
5535-5539		744x140
5540		113x113
5541		187x113
5542		264x113
5543		212x212
5544		505x113




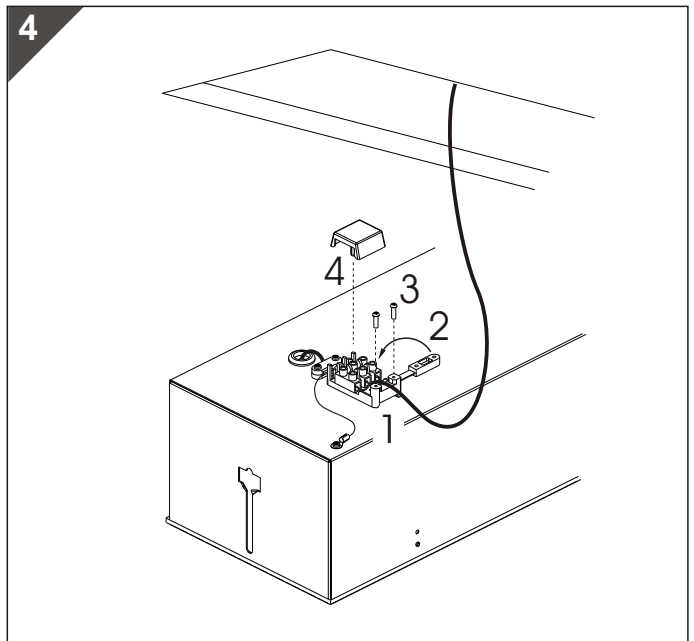


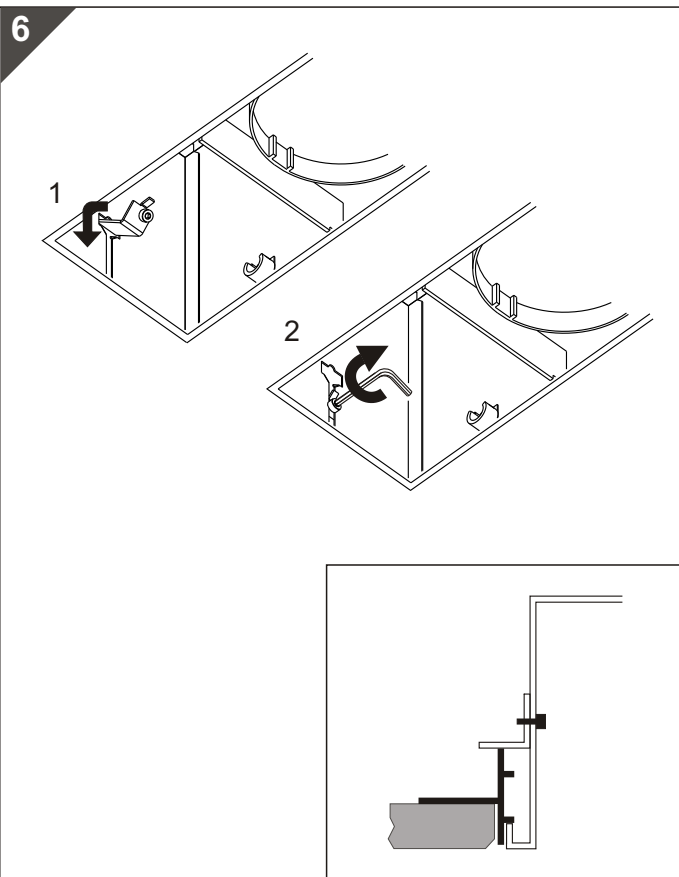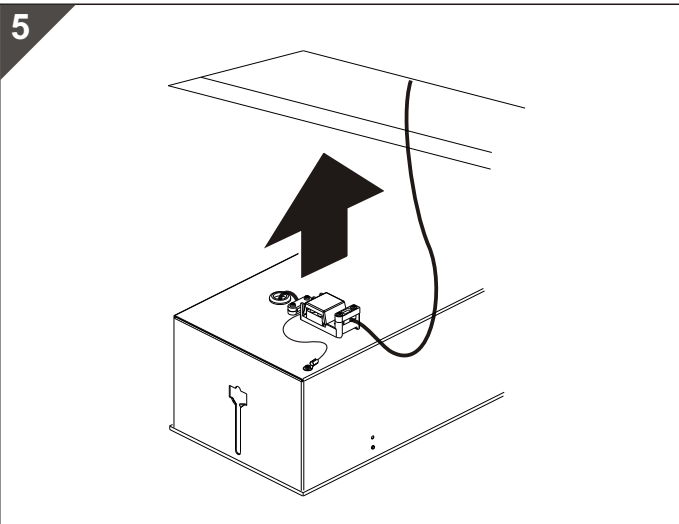

Multigimbalo Trimless Lamp Installation

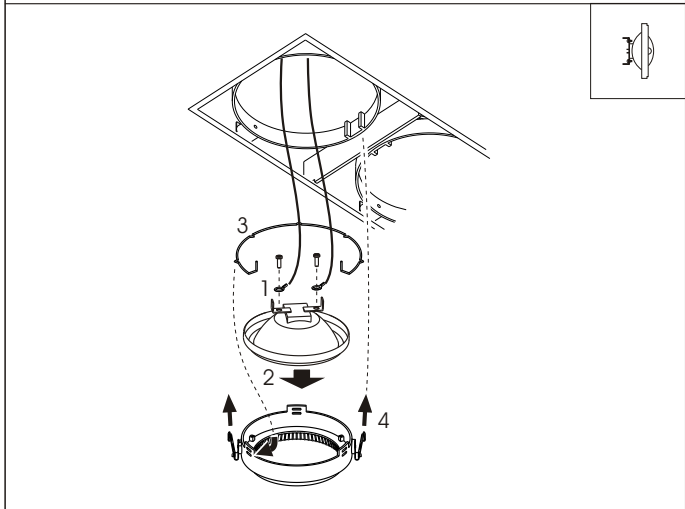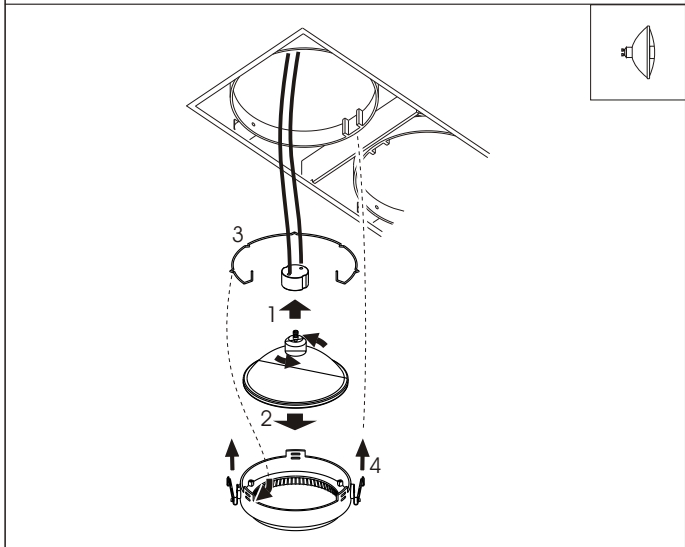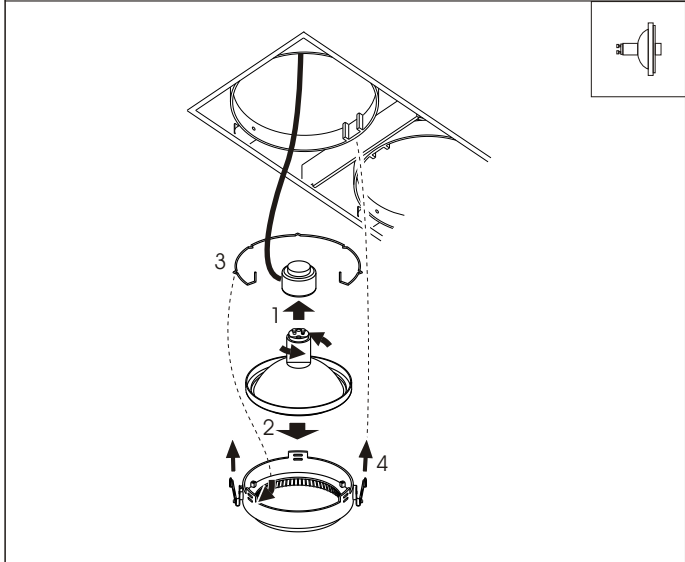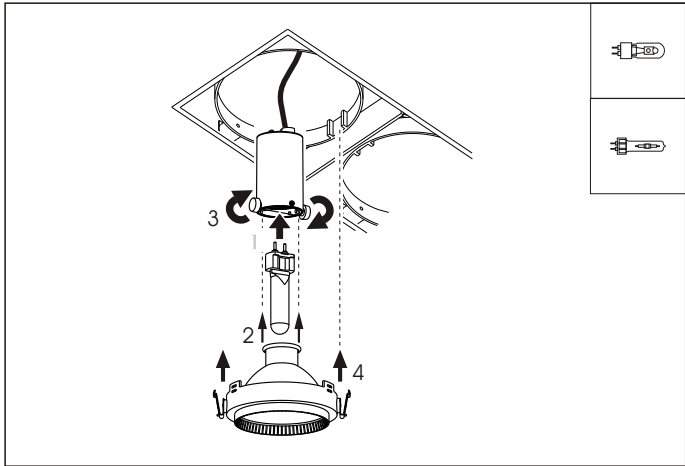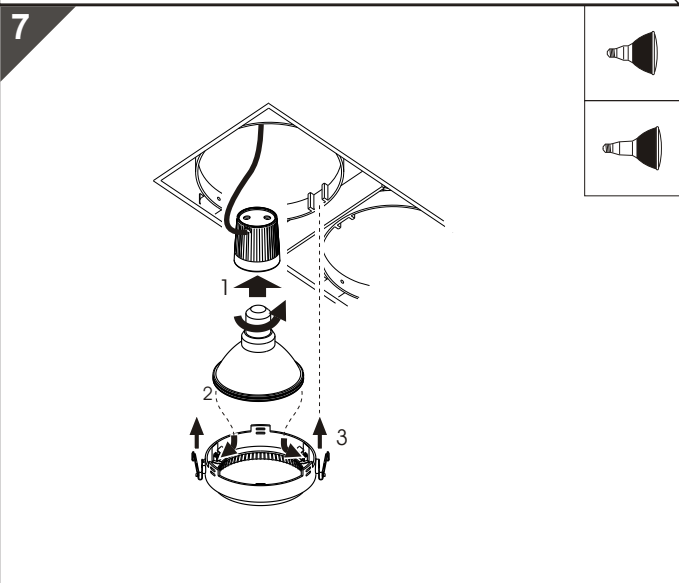


Mini-Multigimbalo Trimless Lamp Installation

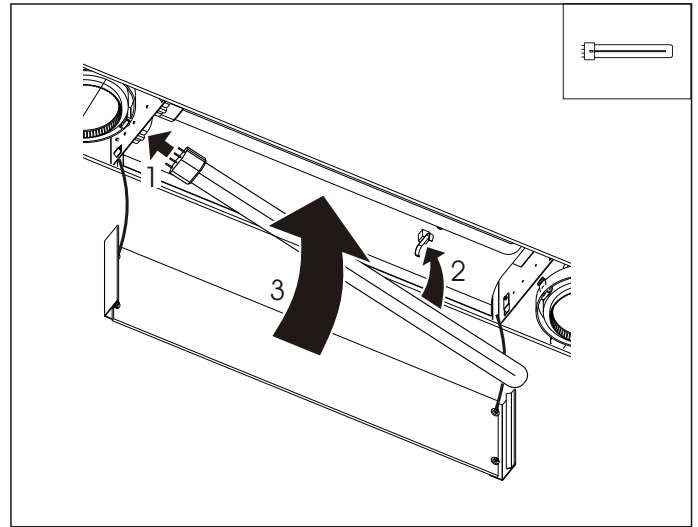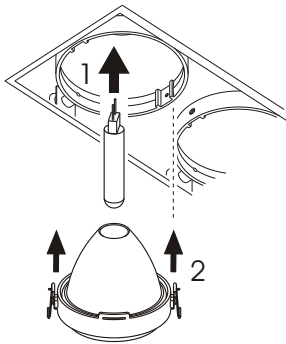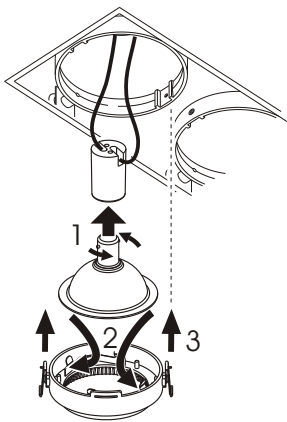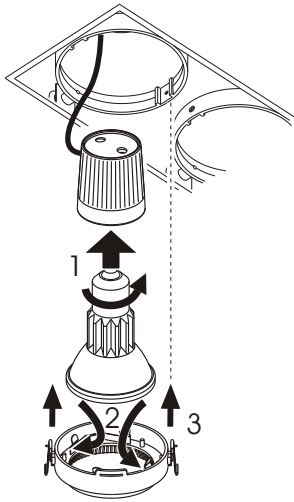


MEASUREMENT

Dimension in mm




Art.	X	Y	H
5470-5475	178	178	225
5476-5478	178	178	145
5479-5484	338	178	225
5485-5487	338	178	145
5488-5493, 5582	502	178	225
5494-5496	502	178	145
5497-5502	340	340	225
5503-5505	340	340	145
5506-5514	952	178	225
5515-5519	138	138	172
5520-5524	263	138	172
5525-5529	382	138	172
5530-5534	263	263	172
5535-5539	742	138	172
5540	111	111	122
5541	185	111	122
5542	262	111	122
5543	210	210	122
5544	688	111	122

Micro-Multigimbalo Trimless Lamp Installation

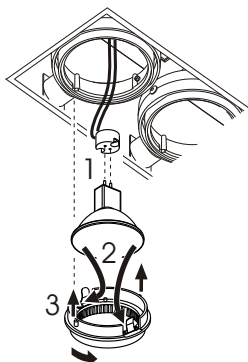







SPECIFICATION



Multigimbalo Trimless 1
 Multigimbalo Trimless 2
 Multigimbalo Trimless 3
 Multigimbalo Trimless 4
 Multigimbalo Trimless TC-L

ART.	ART.	ART.	ART.	ART.	Max. Wattage(W)	Volt.(V) /f(Hz)	Lamp	Remarks	
5470	5479	5488	5497	5506	100	230/50	E27 PAR30(Hal.) 	N.A.	
5471	5480	5489	5498	5507	70	230/50	E27 PAR30(CDM-R) 	**	
5472	5481	5490	5499	5508	35/70/150	230/50	G12 (CDM-T) (Spot light 10°) 	**	
5473	5482	5491	5500	5509	35/70/150	230/50	G12 (CDM-T) (Flood light 40°) 	**	
5474	5483	5492	5501	5510	50/100	230/50	GX12-1 SON (SDW-T) (Spot light 10°) 	**	
5475	5484	5493	5502	5511	50/100	230/50	GX12-1 SON (SDW-T) (Flood light 40°) 	**	
5476	5485	5494	5503	5512	35	230/50	GX8.5 CDM-R111 	**	
5477	5486	5495	5504	5513	75	230/50	GU10 ES111 	N.A.	
5478	5487	5496	5505	5514	100	12	G53 AR111 	*	
					+	55W	230/50	2G11 TC-L 	N.A.

Mini-Multigimbalo Trimless 1
 Mini-Multigimbalo Trimless 2
 Mini-Multigimbalo Trimless 3
 Mini-Multigimbalo Trimless 4
 Mini-Multigimbalo Trimless TC-L

ART.	ART.	ART.	ART.	ART.	Max. Wattage(W)	Volt.(V) /f(Hz)	Lamp	Remarks	
5515	5520	5525	5530	5535	50	230/50	E27 PAR20(Hal.) 	N.A.	
5516	5521	5526	5531	5536	35	230/50	E27 PAR20(CDM-R) 	**	
5517	5522	5527	5532	5537	50	12	B15d AR70 	*	
5518	5523	5528	5533	5538	35/70	230/50	G8.5 (CDM-T) (Spot light 15°) 	**	
5519	5524	5529	5534	5539	35/70	230/50	G8.5 (CDM-T) (Flood light 55°) 	**	
					+	36W	230/50	2G11 TC-L 	N.A.

Micro-Multigimbalo Trimless 1
 Micro-Multigimbalo Trimless 2
 Micro-Multigimbalo Trimless 3
 Micro-Multigimbalo Trimless 4
 Micro-Multigimbalo Trimless TC-L

ART.	ART.	ART.	ART.	ART.	Max. Wattage(W)	Volt.(V) /f(Hz)	Lamp	Remarks	
5540	5541	5542	5543	5544	50	12	GU5.3 MR16 	*	
					+	36W	230/50	2G11 TC-L 	N.A.